

Poster presentation

Open Access

Practicing fast-decision BCI using a "goalkeeper" paradigm

Lenny Ramsey, Michael Tangermann, Stefan Haufe and Benjamin Blankertz*

Address: Berlin Institute of Technology, Machine Learning Laboratory, Berlin, Germany

Email: Benjamin Blankertz* - schroedm@cs.tu-berlin.de

* Corresponding author

from Eighteenth Annual Computational Neuroscience Meeting: CNS*2009
Berlin, Germany. 18–23 July 2009

Published: 13 July 2009

BMC Neuroscience 2009, **10**(Suppl 1):P69 doi:10.1186/1471-2202-10-S1-P69

This abstract is available from: <http://www.biomedcentral.com/1471-2202/10/S1/P69>

© 2009 Ramsey et al; licensee BioMed Central Ltd.

Introduction

Brain-computer interfacing (BCI) aims at providing paralyzed patients with a communication device that obviates the need of using the usual motor pathways. A large number of BCI systems is based on motor imagery for encoding the user's intention. Motor imagery typically leads to event-related desynchronization (ERD) of the 10 Hz mu-rhythm in the motor cortex associated to the respective limb. This EEG phenomenon can be used for feedback control for most subjects by a classifier that was individually trained on the subject's EEG [1,2]. We introduce the goalkeeper paradigm that aims at improving online BCI performance by subject training under time pressure conditions.

Methods

Multi-channel EEG of eight BCI-experienced subjects was acquired while they were playing three runs (100 trials each) of a BCI-controlled computer game that imitated the task of a goalkeeper during a penalty kick. During a trial, a ball was moving from the top of the screen towards one of its bottom corners. Using two different types of motor imagery (chosen from left hand, right hand and foot) the subjects had to control the horizontal movements of a bar at the bottom of the screen to catch the ball. Consistent with the goalkeeper metaphor, the bar could only be moved once (like a jump) into one or the other corner. The speed of the ball increased linearly from trial to trial and over the three runs. Subjects had to catch the ball within 2500 ms (at the beginning of run 1) to 1250 ms (at the end of run 3). Late arrival in a correct corner or

arrival in a wrong corner were interpreted as misses. To achieve a constant goalkeeping performance, the subjects were thus required to generate faster and/or stronger ERD responses in the later runs to steer the bar quickly into the correct corner. In an offline analysis, the goalkeeping per-

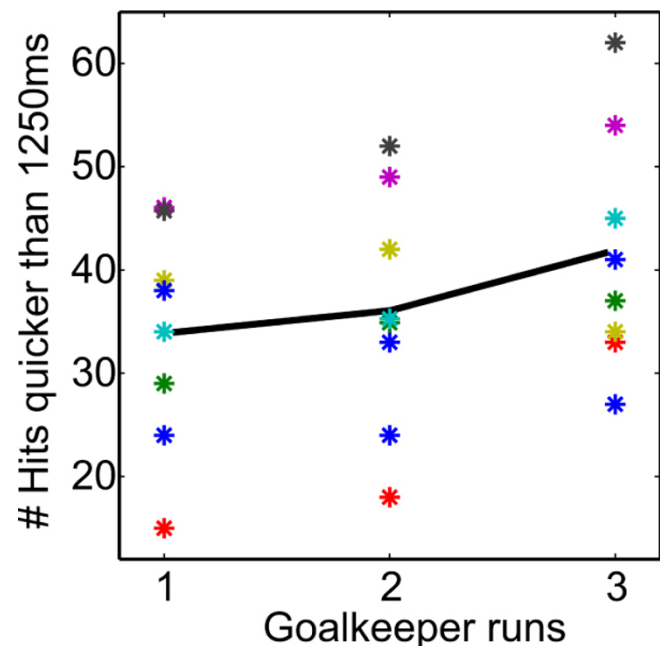


Figure 1
Reaction time improvement for 8 subjects.

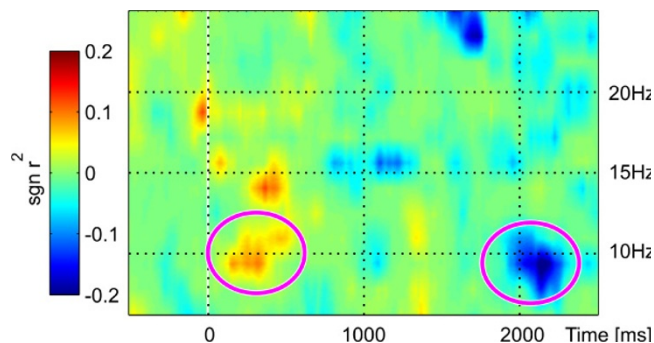


Figure 2
Earlier ERD and earlier ERS around 10 Hz for quicker trials in run 3.

formance, the reaction times (defined as the time needed to reach the correct corner) and EEG features were analyzed in relation to the block design of the experiment.

Results

The goalkeeper paradigm effectively increased time pressure over the 3 runs. Performance was measured in terms of balls caught within the first 1250 ms. Seven out of eight subjects managed to respond with increased performance from run 1 to 3 (average of 33.8 balls caught in run 1 to 41.6 in run 3, see Figure 1).

A close analysis of time-frequency EEG features between successful trials of run 1 and 3 revealed different subject strategies, e.g. earlier ERD or stronger ERD in the alpha band under time pressure. As a side effect, the training introduced for some subjects an additional ERD in the beta band (which had not been used for feedback). Earlier re-synchronization (ERS) could be observed for some subjects in run 3, where trials were shorter (Figure 2).

Acknowledgements

This work is supported by a BMBF grant No. 01GQ0850, a DFG grant MU 987/3-1, and by the European ICT Programme Project FP7-224631. This abstract only reflects the authors' views. Funding agencies are not liable for any use that may be made of the information contained herein.

References

- Müller KR, Tangermann M, Dornhege G, Krauledat M, Curio G, Blankertz B: **Machine learning for real-time single-trial EEG-analysis: from brain-computer interfacing to mental state monitoring.** *J Neurosci Methods* 2008, **167**:82-90.
- Blankertz B, Dornhege G, Krauledat M, Müller KR, Curio G: **The non-invasive Berlin Brain-Computer Interface: Fast acquisition of effective performance in untrained subjects.** *NeuroImage* 2007, **37**:539-550.

Publish with **BioMed Central** and every scientist can read your work free of charge

"BioMed Central will be the most significant development for disseminating the results of biomedical research in our lifetime."

Sir Paul Nurse, Cancer Research UK

Your research papers will be:

- available free of charge to the entire biomedical community
- peer reviewed and published immediately upon acceptance
- cited in PubMed and archived on PubMed Central
- yours — you keep the copyright

Submit your manuscript here:
http://www.biomedcentral.com/info/publishing_adv.asp

