

POSTER PRESENTATION

Open Access


Assisted closed-loops for brain-computer interfaces

Jacobo Fernandez-Vargas, Hanns Uwe Pfaff, Francisco B Rodríguez, Pablo Varona*

From Twenty Second Annual Computational Neuroscience Meeting: CNS*2013
Paris, France. 13-18 July 2013

The *dynamic clamp* technology to implement artificial membrane or synaptic conductances is one of the most successful examples of closed-loop interactions with the nervous system for observation and control purposes (for a review see [1]). We recently proposed a generalization of the *dynamic clamp* concept to design goal-driven closed-loop interactions with biological systems beyond electrical stimulation and recording in the context of *in vitro* electrophysiology and animal ethology

[2]. Following the same activity-dependent stimulation approach, we designed an *assisted closed-loop* (ACL) to optimize the efficiency of brain-computer interfaces (BCI) based on *steady state visually evoked potentials* (SSVEP) [3]. SSVEP based BCIs use multiple visual stimuli such as LEDs or regions on a screen flickering at different frequencies. A subject's brain generates electrical activity at the same fundamental frequency as the visual stimulus on which the subject has focused his/her

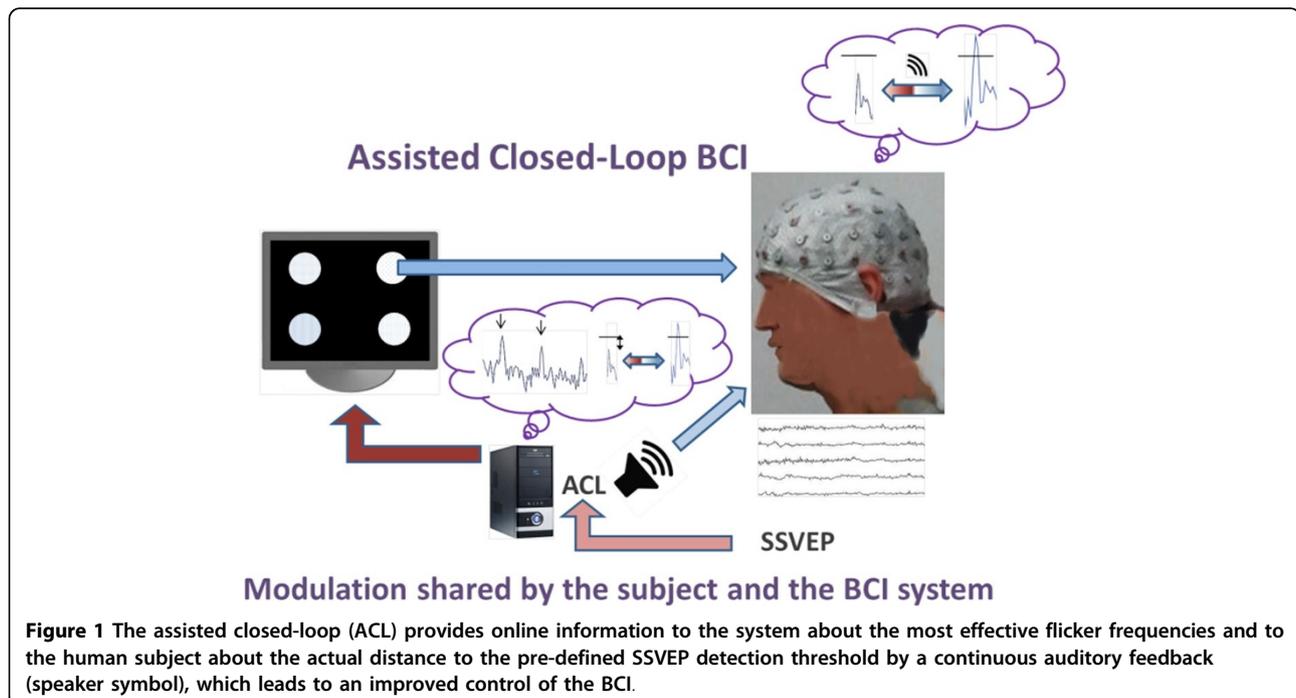

* Correspondence: pablo.varona@uam.es

Grupo de Neurocomputación Biológica, Dpto. de Ingeniería Informática,
Escuela Politécnica Superior, Universidad Autónoma de Madrid, 28049,
Madrid, Spain

attention. The ACL consists in the delivery of online information with regard to the control over the given BCI goal both to the human subject and to the system, resulting in an online adaptation of BCI stimuli properties, in this first proof of concept study the combination of the employed flicker frequencies (Figure 1). The optimization process is realized by first performing a real-time closed-loop search for the best set of stimulation frequencies to achieve the given BCI goal, which informs the system about the most effective flicker frequencies to produce SSVEPs in a given subject. Secondly, a continuous auditory feedback informs the subject about the actual distance to a predefined detection threshold.

Our results show that this shared online information leads to an enhanced BCI efficiency, as compared to classic BCI protocols, by helping them to reach the BCI goal in their interaction. The analysis also shows that the ACL protocol takes into account interindividual variabilities. In particular, baseline resting state EEG measures seem to predict subjects' BCI performances, which indicates that the ACL based BCIs might be expanded to innovative new diagnostic/therapeutic tools for clinical contexts and as new paradigms for basic research. Taking all together, these results illustrate that assisted closed-loop protocols can reveal dynamics otherwise hidden under traditional stimulation techniques, provide control of regular and pathological states, induce learning processes, bridge between distinct levels of analysis and lead to automation of experiments. The proposed approach might have a large impact for applied uses, such as computer control and biomedical or prosthetic uses, but also in novel paradigms for neuroscientific and biomedical research.

Acknowledgements

This work was supported by UAM CEMU 2012-004, MINECO TIN2012-30883 and TIN-2010-19607.

Published: 8 July 2013

References

1. Destexhe A: In *Dynamic-Clamp: From Principles to Applications*. Springer, New York; Bal T 2009.
2. Chamorro P, Muñiz C, Levi R, Arroyo D, Rodríguez FB, Varona P: Generalization of the dynamic clamp concept in neurophysiology and behavior. *PLoS ONE* 2012, **7**:e40887.
3. Fernandez-Vargas J, Pfaff HU, Rodríguez FB, Varona P: Assisted closed-loop optimization of SSVEP-BCI efficiency. *Frontiers in Neural Circuits* 2013, **7**, Article 27.

doi:10.1186/1471-2202-14-S1-P406

Cite this article as: Fernandez-Vargas *et al.*: Assisted closed-loops for brain-computer interfaces. *BMC Neuroscience* 2013 **14**(Suppl 1):P406.

Submit your next manuscript to BioMed Central and take full advantage of:

- Convenient online submission
- Thorough peer review
- No space constraints or color figure charges
- Immediate publication on acceptance
- Inclusion in PubMed, CAS, Scopus and Google Scholar
- Research which is freely available for redistribution

Submit your manuscript at
www.biomedcentral.com/submit

